

Prizmatix

Black-LED-435 Fiber Coupled LED Light Source

Introduction

The new compact fiber-coupled high power violet indigo LED light source module at **435 nm** is an effective replacement of lasers and lamps in many applications, such as spectroscopy and inspection and component testing. This new member of the modular OptiBlocks family provides up to **29 mW** of CW power at fiber output (2000micron core POF fibers). The LED driver supports CW or external TTL modulation with user controllable frequency and duty cycle.



Features

- High Power
- Speckle free
- LED spectrum can be narrowed by optional band pass filter
- Compact and robust head: 50mm x 50mm x 40mm
- Reciprocal SMA, FC or ST fiber connection
- TTL external modulation (Analog modulation is an option)
- Precisely adjustable power
- Long life (no lamp or laser tube replacement required)

Replacement of

- Krypton/Argon lasers
- Diode lasers
- Lamps

Applications

- Spectroscopy
- LED Fluorescence excitation CFP 436 nm , Alexa Fluor, Quantum dots
- Bio analysis
- Component test and inspection

Main Office

Phone: +972-8-929-7844
Fax: +972-8-929-8772
sales@prizmatix.com

European Sales Office

Phone: +44 (0)77-9172-9592
Fax: +44 (0)20-7681-2977
sales.europe@prizmatix.com

North America Sales Office

Phone: +1-(248)-436-8085
Fax: +1-(248)-281-5236
sales.usa@prizmatix.com

16 Or-Hahaim St., P.O.B. 4234 Modiin-Ilite 71919, Israel

Prizmatix

Specifications


Peak wavelength: 435±3 nm Typ.

Spectrum half width: 18 nm Typ.

Power output:

Black-LED power output is limited by the reciprocal fiber characteristics. Larger core and higher NA will increase maximum power output, and vice versa.

The table below shows a few examples of the CW output power at different fibers:

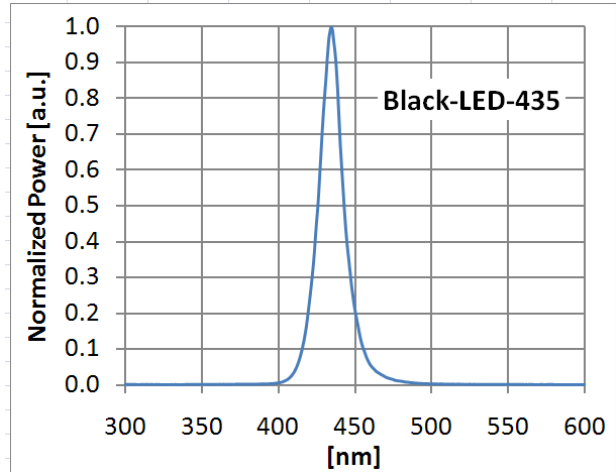

Fiber brand	Fiber type ^{*1}	NA	Fiber Core Diameter	Output Power Typ. ^{*2}
Mitsubishi Rayon Super Eska SH8001	POF	0.5	2000 μm	29 mW
Mitsubishi Rayon Super Eska SH6001	POF	0.5	1500 μm	27 mW
Mitsubishi Rayon Super Eska SH4001	POF	0.5	1000 μm	22 mW

*1: Fiber length ~ 1 m; POF – Polymer Optical Fiber

*2: The measurement done by Ophir Nova II power meter equipped with PD300-UV head. The wavelength is set at 435 nm. The values are for non filtered Black-LED-436.

Optical output connector:

The Black-LED is available with SMA, FC or ST reciprocal fiber connector

Dimensions:

Black-LED head: 50mm x 50mm x 40mm

Black-LED controller: 75mm x 40mm x 120mm (W x H x L) without key switch and other extrusions

Power adaptor: 60mm x 35mm x 10mm (W x H x L)

Main Office

Phone: +972-8-929-7844
 Fax: +972-8-929-8772
 sales@prizmatix.com

European Sales Office

Phone: +44 (0)77-9172-9592
 Fax: +44 (0)20-7681-2977
 sales.europe@prizmatix.com

North America Sales Office

Phone: +1-(248)-436-8085
 Fax: +1-(248)-281-5236
 sales.usa@prizmatix.com

16 Or-Hahaim St., P.O.B. 4234 Modiin-Ilite 71919, Israel

Prizmatix

Benchtop LED Current Controller

Introduction

The Benchtop LED current controller has been designed to provide precisely controllable, low noise current for driving a variety of LEDs. The current controller can be configured to drive virtually any currently available LED including the high power LEDs in constant current (CW) or chopping mode defined by external TTL input. Analog modulation input is an option.



Features

- Constant current or chopping modes
- Precise LED current setting
- Safety features for HP and UV LEDs
- TTL external modulation
- Optional Analog input
- Compact and robust enclosure

Specifications

Output current control range: factory preset to 350, 500, 700 or 1000mA

Output voltage: 1-15 V

TTL / Analog modulation frequency: DC – 10 KHz

Connector for LED: 9-pin D-type

Connector for TTL / Analog input: BNC

Input power supply: 24 VDC, 1 A

Power adaptor input: 100-240 VAC, 1 A, 47-63 Hz

Dimensions:

Controller: 75mm x 40mm x 120mm (W x H x L) without key switch and other extrusions

Power adaptor: 60mm x 35mm x 10mm (W x H x L)

Main Office

Phone: +972-8-929-7844

Fax: +972-8-929-8772

sales@prizmatix.com

European Sales Office

Phone: +44 (0)77-9172-9592

Fax: +44 (0)20-7681-2977

sales.europe@prizmatix.com

North America Sales Office

Phone: +1-(248)-436-8085

Fax: +1-(248)-281-5236

sales.usa@prizmatix.com

16 Or-Hahaim St., P.O.B. 4234 Modiin-Ilite 71919, Israel
